




**T15 METAL
RUBBER-FITTED**

Height.....	810 mm (31.9")
Width.....	432 mm (17.0")
Depth.....	279 mm (11.0")
Est. Ship Weight.....	Aluminum 53 kg (116 lbs)
	Cast Iron 91 kg (200 lbs)
	316 Stainless Steel 79 kg (175 lbs)
Air Inlet.....	19 mm (3/4")
Inlet.....	76 mm (3")
Outlet.....	76 mm (3")
Suction Lift.....	5.5 m Dry (18')
	9.45 m Wet (31')
Displacement/Stroke.....	5.3 l (1.40 gal.) ¹
Max. Flow Rate.....	878 lpm (232 gpm)
Max. Size Solids.....	10 mm (3/8")

¹Displacement per stroke was calculated at 4.8 bar (70 psig) air inlet pressure against a 2 bar (30 psig) head pressure.

Example: To pump 530 lpm (140 gpm) against a discharge pressure head of 2.1 bar (30 psig) requires 4.1 bar (60 psig) and 136 Nm³/h (60 scfm) air consumption. (See dot on chart.)

Caution: Do not exceed 8.6 bar (125 psig) air supply pressure.

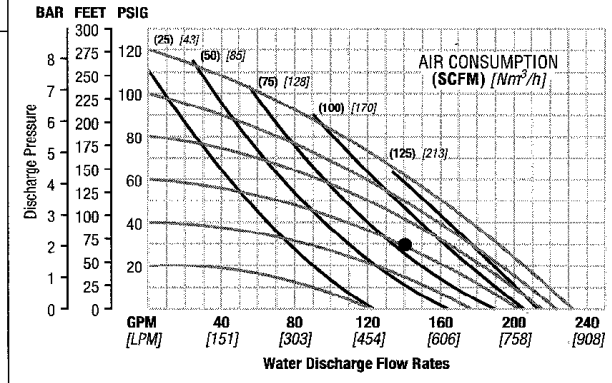

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump performance curve.